



info@stenkim.com.tr | stenkim.com

StenFloor®

FLOOR COATING SYSTEMS



STENKIM CONSTRUCTION CHEMICALS

Our company Stenkim® Kimya Maddeler Sanayi ve Ticaret A.Ş. was established in 1986 and specializes in the field of construction chemicals. Our current product portfolio consists mainly of sealants, floor systems, coatings, additives, concrete repair and reinforcement products, waterproofing materials and polycarboxylates. The technical knowledge and engineering skills acquired over 30 years are used to design and manufacture products that compete with or even exceed the quality of our multinational competitors. We are always designing new products and expanding our portfolio to meet the changing demands of the construction industry as well as the unique demands of specific construction projects. We are the first and sometimes the only domestic manufacturer of many leading construction chemicals. Our dynamic structure, commitment to continuous improvement, determination and enthusiasm are the keys to our regular growth.

Stenkim®'s the idea of the organization is to design, manufacture and certify products in accordance with existing standards. We can achieve this goal with our expert design engineers, highly advanced production and R&D facilities and self-developed technologies. Uncompromising Stenkim® quality is the result of meticulous quality controls at every stage of production, from the acceptance of raw materials to the approval of finished products. Our quality-oriented structure extends to our services as well as our products. We aim to provide the best possible product experience not only to our customers, but to all the people and businesses we touch.

We strive to meet the aesthetic and technical demands of the contemporary construction market. We are a customer-oriented company that is empowered by employees with high environmental and social sensitivity. So far, we operate in 5 continents and 35 different countries with subsidiaries and distributors in 6 countries. Our goal is to become one of the world-renowned brands.

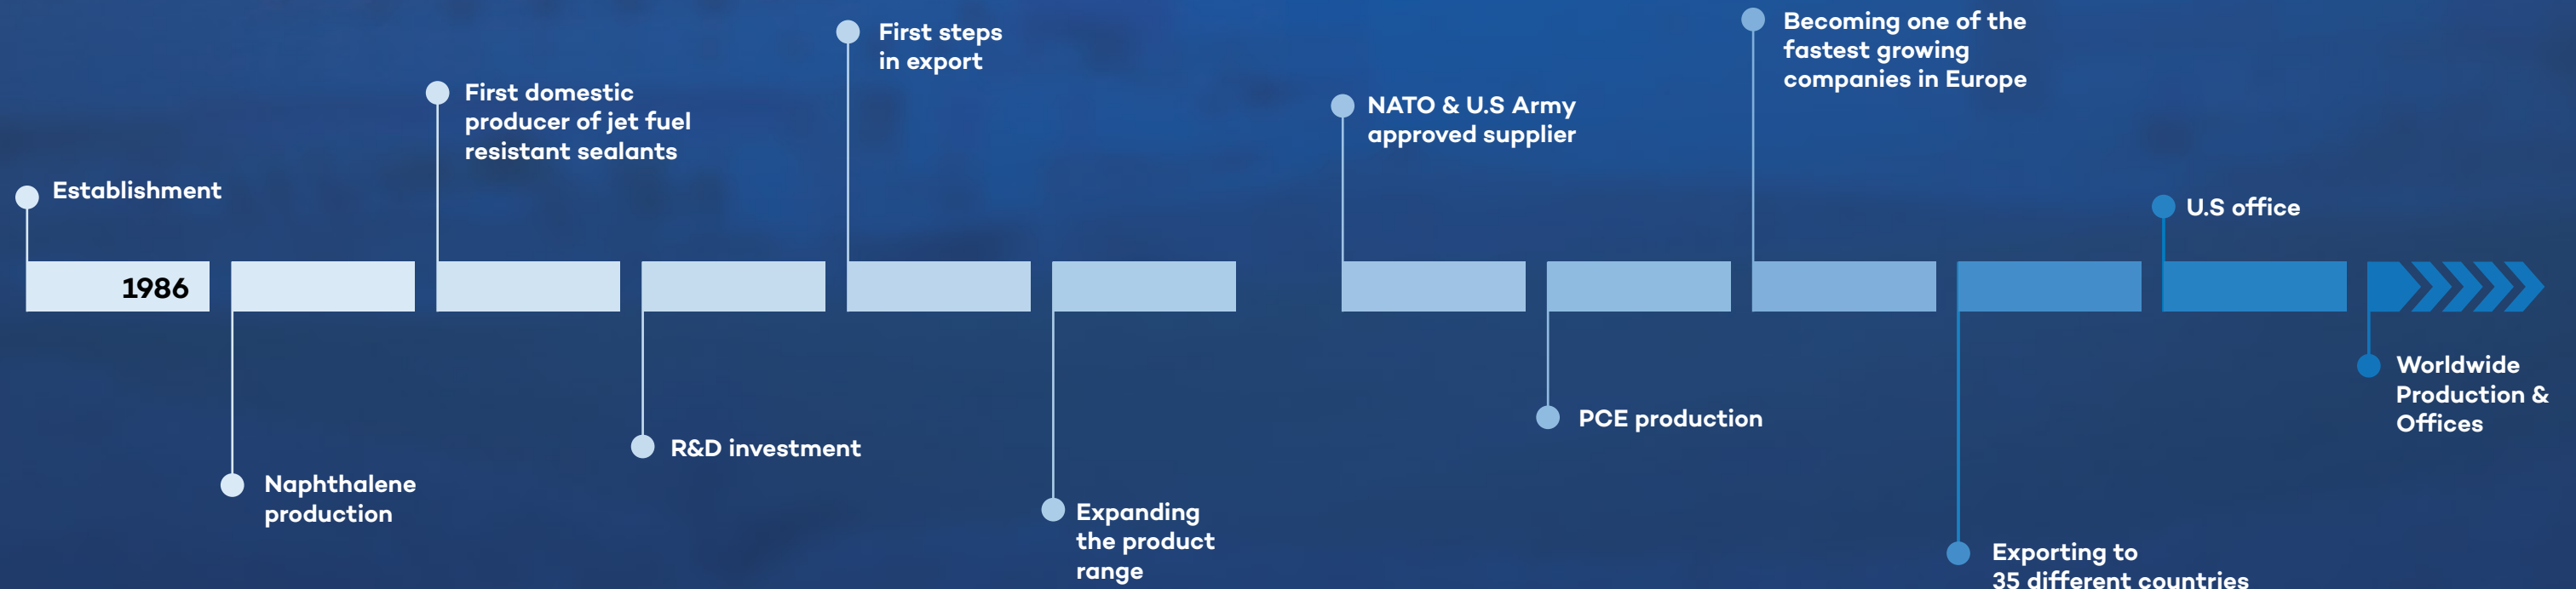


TABLE OF CONTENTS

06 **StenFloor® SELECT**

Shopping malls, shops, restaurants, offices, airports, schools, social facilities, waiting rooms, exhibition spaces, residences, hospitals, pharmacies.

08 **StenFloor® KEEP**

Loading areas, car parks, ramps, sloping surfaces, pool edges, wet floors such as bathrooms, social facilities, shopping malls, industrial facilities, production areas.

10 **StenFloor® OPT-T**

Ramps, sloping surfaces, pool edges, wet floors such as bathrooms, social facilities, industrial facilities and walkways in production areas.

12 **StenFloor® OPT-S**

Industrial facilities, hangars, social facilities, walking paths in production areas.

14 **StenFloor® DUTY-L**

Chemical process areas, wet and dry areas in food preparation places, airports, hangars, clean rooms, production facilities, medium-service workplaces, water filling facilities, dining halls, maintenance and repair shops, social spaces, printing houses, warehouses, loading areas.

16 **StenFloor® DUTY-H**

Loading areas, chemical process areas, wet and dry areas in food preparation places, airports, hangars, clean rooms, production facilities, water filling facilities, dining halls, maintenance and repair workshops, printing houses, social spaces, warehouses.

18 **StenFloor® AQUA**

Social spaces, offices, waiting rooms, parking lots, workplaces, maintenance and repair workshops, printing houses, doctors' offices, clean rooms, food preparation places, production facilities, water filling facilities, dining halls.

20 **StenFloor® PAD**

Sports halls, skating, dancing, gymnasiums, trails, schools, nurseries, hospitals, offices, health-sports centers, children's playgrounds.

22 **StenFloor® SCREED**

All enclosed areas where forklift, pallet truck and vehicle traffic is involved, environments where frequently cleaned thermal shocks, solvents and chemicals that will cause corrosion, chemical process areas, wet and dry areas in food preparation places, heat treatment areas and cold rooms, soft drink facilities, water filling facilities, dining halls, laboratories, medium and heavy duty workplaces, warehouse and packaging areas, maintenance and repair, production facilities, printing houses.

24 **StenFloor® ARMOR**

Heat treatment areas and cold rooms, all enclosed areas where forklift, pallet trucks and vehicle traffic are involved, environments where thermal shocks, solvents and chemicals that will cause corrosion, chemical process areas, wet and dry areas in food preparation places, soft drink facilities, water filling facilities, dining halls, laboratories, medium and heavy duty workplaces, warehouse and packaging areas, maintenance and repair, production facilities, printing houses.

26 **StenFloor® CORAL**

Kitchens, pharmaceutical research centers, restaurants, hospitals, schools, banks, lobbies, shopping malls, shops, airport terminals, train and bus stations, convention centers.

28 **StenFloor® TERRA**

Airport terminals, hospitals, restaurants, kitchens, pharmaceutical research centers, schools, banks, lobbies, shopping malls, train and bus stations, convention centers.

30 **StenFloor® BLOCK-W**

Terraces and roofs, industrial facilities, prefabricated buildings, bathrooms and similar wet places.

32 **StenFloor® BLOCK-HW**

Multi-storey car parks, open garages, terraces and roofs, prefabricated buildings, bathrooms and similar wet places, walkways, industrial facilities.

34 **StenFloor® BLOCK-C**

Switches, electrical control rooms and cabinets, where there is a danger of contact with electricity, the possibility of a short circuit.

36 **StenFloor® ESD**

Areas where sensitive electronic materials are produced, transported, stored, factory floors, areas where flammable gases are processed, filled or stored, manufacturing, storage areas of explosive materials, fuel tanks.

39 **Epoxy Based Transparent Floor Varnishes**

StenCoat® 2EPV
StenCoat® 3EP GRIP

39 **Polyurethane Based Transparent Floor Varnishes**

StenCoat® 2PUV 203

40 **StenCoat® 2PU TOP Polyurethane Based Protective Paints**

StenCoat® 2PU TOP HD
StenCoat® 2PU TOP FX
StenCoat® 2PU TOP UV

41 **Line and Marker Paints**

StenCoat® CR-L
StenCoat® CR-LID

42 **Primers and Surface Conditioners**

StenAst® 2EP
StenAst® 2EP F
StenAst® 2EP CC
StenAst® 2EP OR
StenAst® 2EP MB
StenAst® 2EP MT

FLOOR SYSTEMS

StenFloor®


The floors of your living spaces, industrial facilities, commercial spaces are much more than just a surface to walk on. Your floors should permanently meet the specific needs of your areas of use, while providing ease of use and maintenance. Stenkim® is aware of these special requirements and offers the best solutions for these needs under the **StenFloor®** series polymeric floor systems.

Get the Best with **StenFloor®**

- More comfortable and decorative spaces with customizable looks that allow for special designs
- Anti-slip, insulator, antistatic and many other safety-oriented features
- Long-term cost-effective solutions with easy maintenance and long service life
- High chemical, abrasion and impact resistance
- Ability to open application areas in a short time
- Sanitary and easy-to-clean floors

Properties

- Smooth, glossy surface
- Long service life
- Wide range of colours
- Ease of application

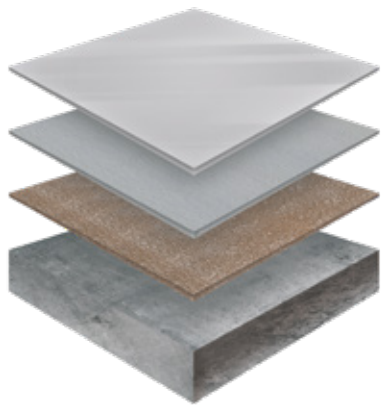

Final Floor
StenCoat® 2EP 250

Mezzanine
StenCoat® 2EP 250
StenSilica 100-300

Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

StenFloor® SELECT offers a decorative and durable floor. It is easily applied thanks to its self-leveling surface leveling feature. The system does not contain solvents, allows use in closed areas. By making the desired choice from a wide color scale, flamboyant, aesthetic and inviting areas are obtained. Designed seamless floors are easily cleanable, hygienic. It is resistant to cleaning chemicals and abrasion, retains its decorative properties for a long time.

Areas of Use : Shopping malls, restaurants, offices, airports, schools, social facilities, waiting rooms, exhibition areas, residences, hospitals, pharmacies.

Base Resin : Epoxy
Thickness : 2,00 - 2,20 mm
Binding Quantity : 2.200 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 250	1200
Mezzanine	StenCoat® 2EP 250 StenSilica 100-300	600 300
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Properties

- Non-slip surface
- Long service life
- Suitable for heavy traffic
- Textured surface
- High chemical resistance



StenFloor® KEEP improves the skidding, abrasion and chemical resistance properties of the surface. The density of the surface texture can be easily adjusted according to the application area. The system does not contain solvents, allows use in closed areas. It has high abrasion and fouling resistance. Can be used in inclined areas. It provides a safe working environment thanks to its durability and texture on surfaces that will be exposed to normal and medium weight loads.


Areas of Use : Loading areas, parking lots, ramps, inclined surfaces, pool edges, wet floors such as bathrooms, social facilities, shopping malls, industrial facilities, production areas.

Base Resin : Epoxy
Thickness : 1,50 - 1,80 mm
Connector Quantity : 1.650 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 211	650
Mezzanine	StenCoat® 2EP 250 StenSilica 100-300	600 300
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Properties

- Textured surface
- High chemical resistance
- Cost-effective
- Non-slip surface

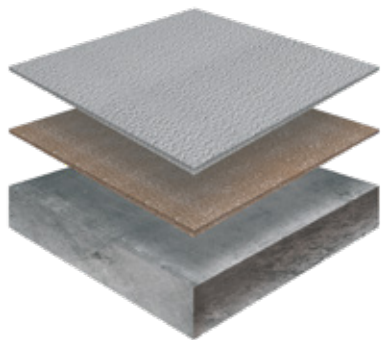

Final Floor
StenCoat® 2EP 211

Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

StenFloor® OPT-T offers a safe and cost-effective solution for pedestrian traffic by increasing the shear strength of the surface. The density of the surface texture can be easily adjusted according to the application area. The system does not contain solvents, allows use in closed areas. It offers the most cost-effective solution for decorative and no-slip surface in areas that will not be exposed to heavy loads.

Areas of Use : Ramps, sloping surfaces, pool edges, wet floors such as bathrooms, social facilities, industrial facilities and walking paths in production areas.

Base Resin : Epoxy
Thickness : 1,10 - 1,20 mm
Connector Quantity : 1.100 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 211	700
Sand Blunt	StenSilica 500 MIX	600
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Properties

- Cost-effective
- Easy to apply
- Decorative
- Self-leveling
- High chemical resistance



StenFloor® OPT-S offers a safe and cost-effective solution for self-surface leveling. The density of the surface texture can be easily adjusted according to the application area. The system does not contain solvents, allows use in closed areas. It prevents the surface it protects from wearing, wetting and waterproofing, providing a cost-effective and efficient solution.

Areas of Use : Industrial facilities, hangars, social facilities, walking paths in production areas

Base Resin : Epoxy
Thickness : 1,00 - 1,10 mm
Connector Quantity : 900 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 180	500
Sand Blunt	StenSilica 500 MIX	600
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

DUTY-L

StenFloor®



Properties

- Cost-effective
- Easy to apply
- Robust & Durable
- Wide range of uses
- High chemical resistance



StenFloor® DUTY-L is the ideal floor system for medium weight service. It is resistant to abrasion, chemical effects and penetration, creates a long-lasting and robust surface in a seamless structure. The system does not contain solvents, allows use in closed areas. It is resistant to inorganic acids and alkalis, oil, fuel and antifreeze, and many chemicals.

Areas of Use : Chemical process areas, wet and dry areas in food preparation places, airports, hangars, clean rooms, production facilities, medium-service workplaces, water filling facilities, dining halls, maintenance and repair workshops, social spaces, printing houses, warehouses, loading areas.

Base Resin : Epoxy
Thickness : 2,50 - 2,70 mm
Connector Quantity : 2.600 g/m²



LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 510	1600
Mezzanine	StenCoat® 2EP 510	600
	StenSilica 100-300	300
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP	400
	StenSilica 100-300	400

DUTY-H

StenFloor®

Properties

- Easy to apply
- Robust & Durable
- Wide range of uses
- High chemical resistance

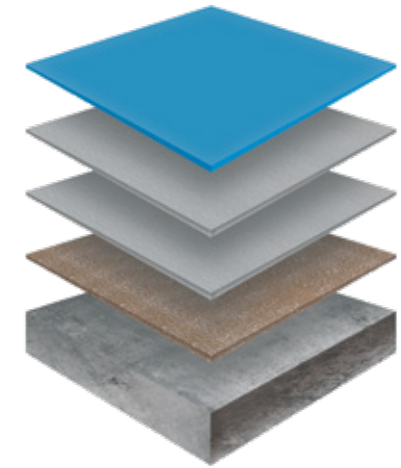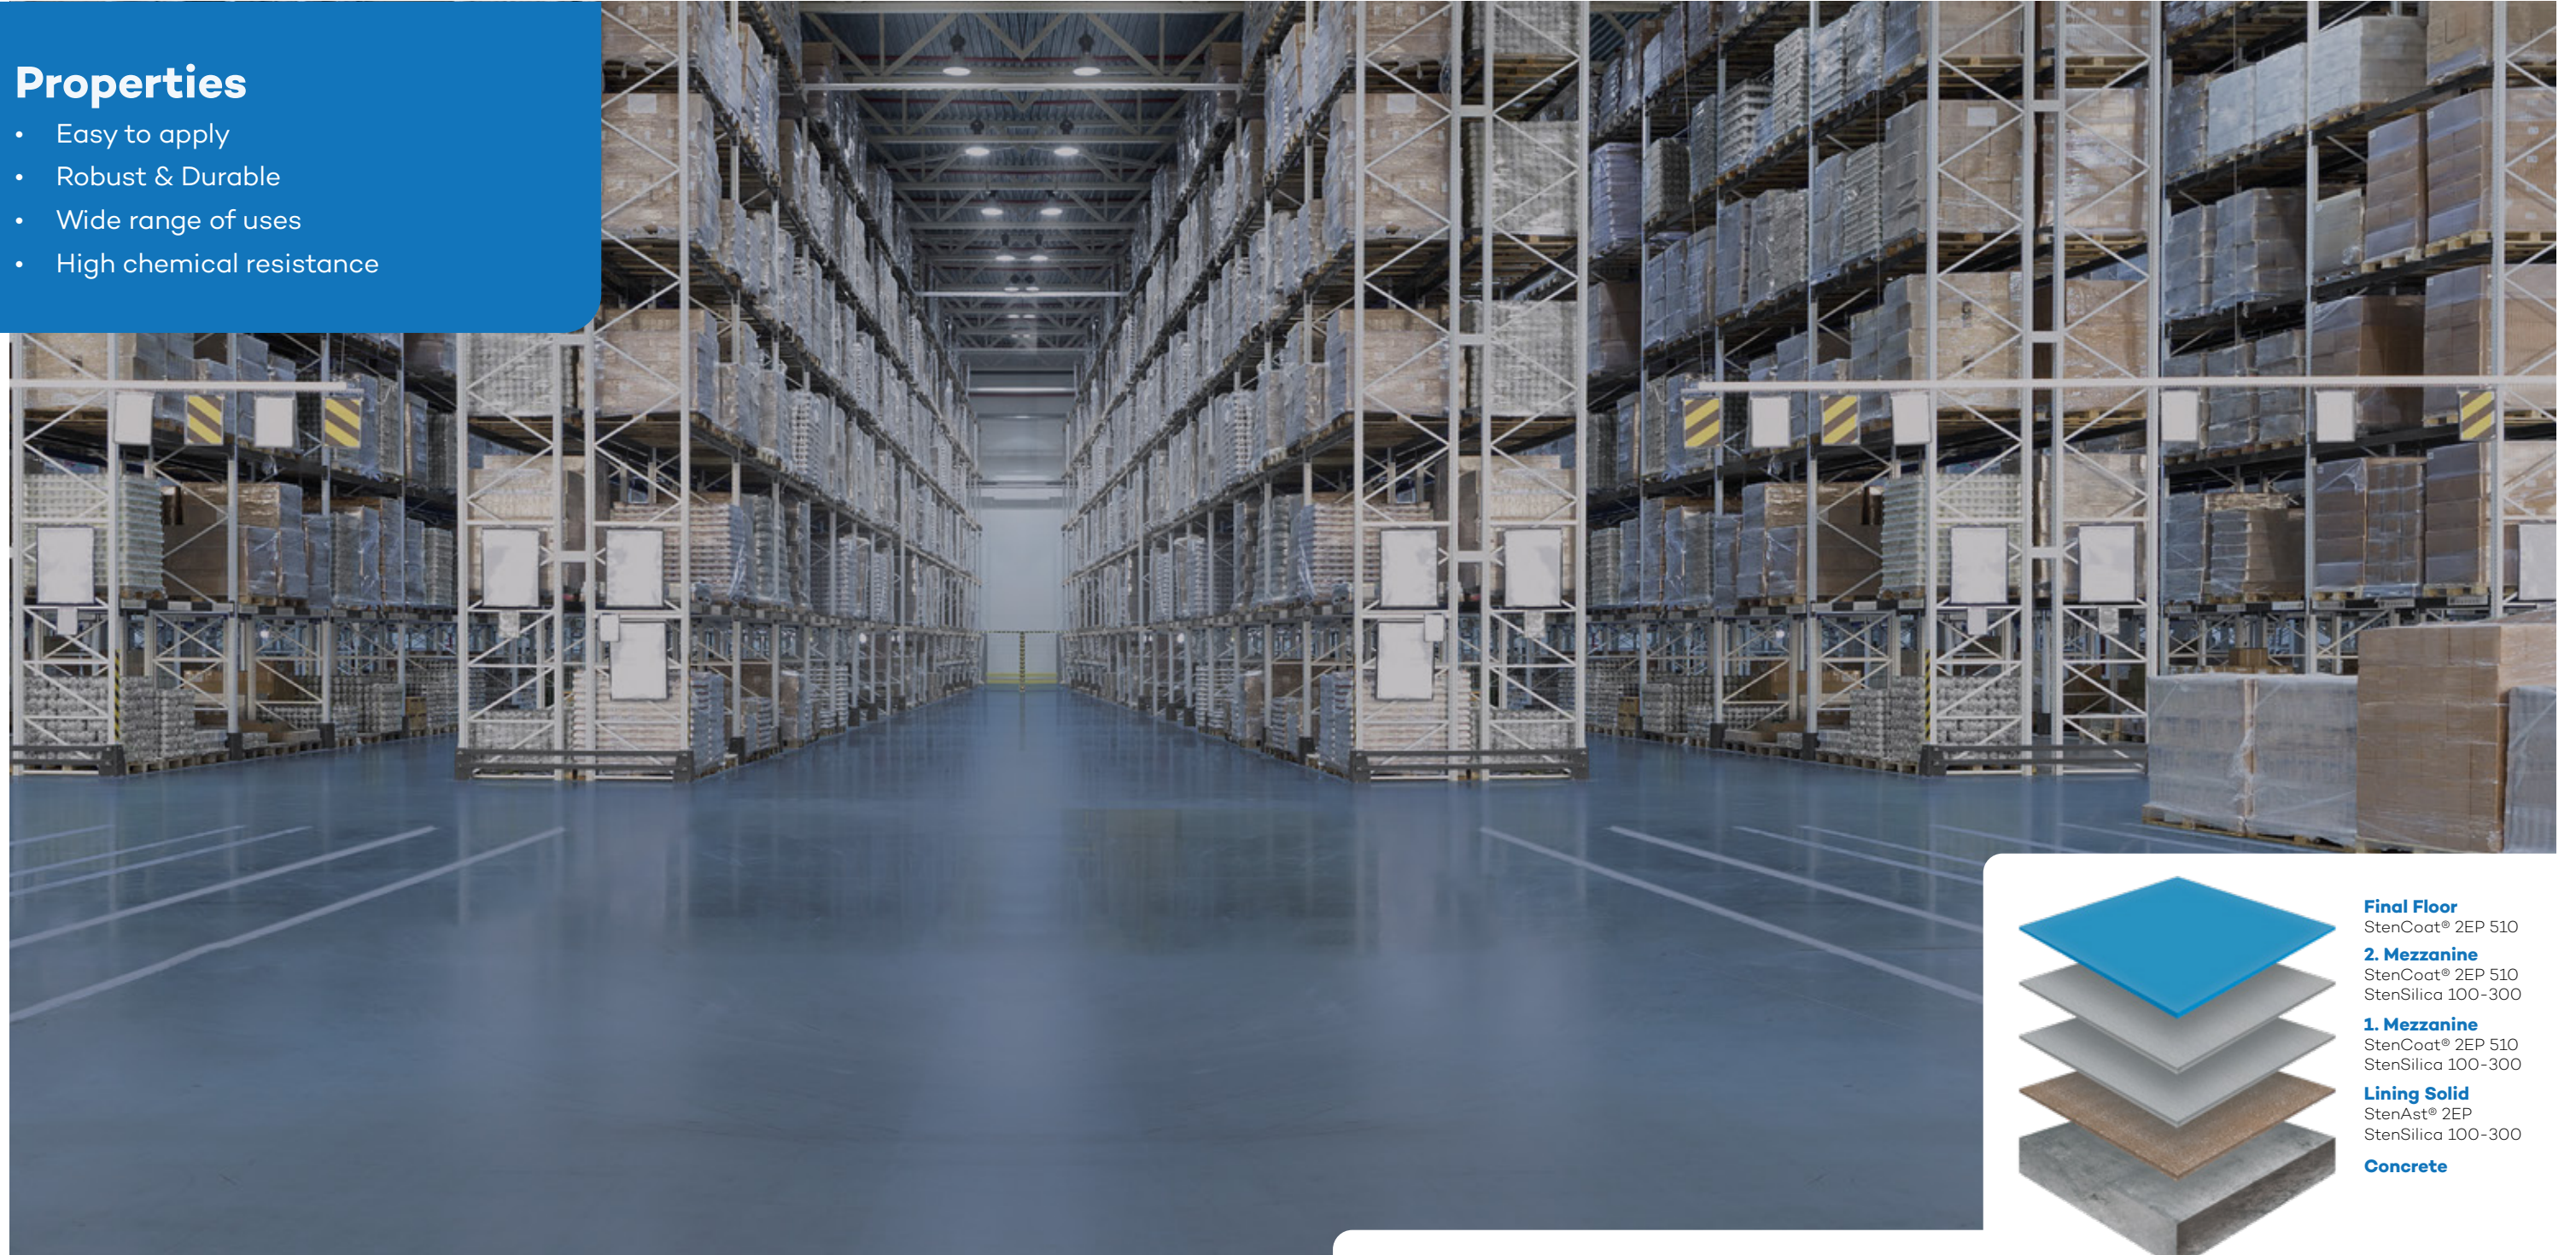

Final Floor
StenCoat® 2EP 510

2. Mezzanine
StenCoat® 2EP 510
StenSilica 100-300

1. Mezzanine
StenCoat® 2EP 510
StenSilica 100-300

Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

StenFloor® DUTY-H is the ideal floor system for heavy duty. It is resistant to abrasion, chemical effects and penetration, creates a long-lasting and robust surface in a seamless structure. The system does not contain solvents, allows use in closed areas. It is resistant to inorganic acids and alkalis, oil, fuel and antifreeze, and many chemicals.


Areas of Use : Yükleme alanları, kimyasal proses alanları, gıda hazırlama yerlerindeki ıslak ve kuru alanlar, havalimanları, hangarlar, temiz odalar, üretim tesisleri, su dolum tesisleri, yemekhaneler, bakım onarım atölyeleri, matbaalar, sosyal mekanlar, depolar.

Base Resin : Epoxy
Thickness : 3,00 - 3,20 mm
Connector Quantity : 3.200 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 510	1600
2. Mezzanine	StenCoat® 2EP 510 StenSilica 100-300	600 300
1. Mezzanine	StenCoat® 2EP 510 StenSilica 100-300	600 300
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Propertie

- Non-slip surface
- Waterproof
- Easy to apply
- High chemical resistance
- Can be applied to wet and moist surfaces

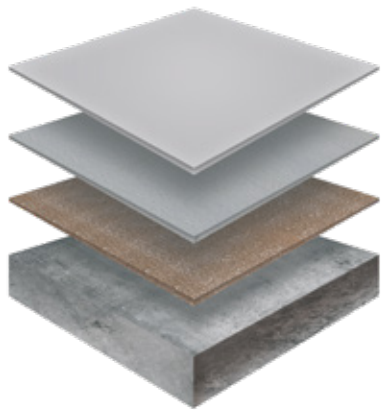

Final Floor
StenCoat® 2EP 402

Mezzanine
StenCoat® 2EP 402

Lining Solid
StenAst® 2EP MT

Concrete

StenFloor® AQUA is a water-based, epoxy-based high-performance flooring system. It can be applied on wet and damp surfaces. With its breathable structure with water vapor permeability, it allows moisture to be removed from the ground and prevents swelling. It is resistant to weak acids and bases, detergents, disinfectants, hydraulic oils and various solvents and fuels. It increases the dust, abrasion, oxidation and fouling resistance of the surface it protects. Thanks to the increased concealment feature, the begging surface and texture density can be reached with less consumption.


Areas of Use : Social spaces, offices, waiting rooms, parking lots, workplaces, maintenance and repair shops, printing houses, doctors' offices, clean rooms, food preparation places, production facilities, water filling facilities, dining halls.

Base Resin : Epoxy
Thickness : 0,90 - 1,00 mm
Connector Quantity : 900 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Final Floor	StenCoat® 2EP 402	200
Mezzanine	StenCoat® 2EP 402	200
Sand Blunt	StenSilica 500 MIX	600
Lining Solid	StenAst® 2EP MT	300

Properties

- Flexible
- Shock absorber
- Easy to apply
- Ideal for sports and gaming areas

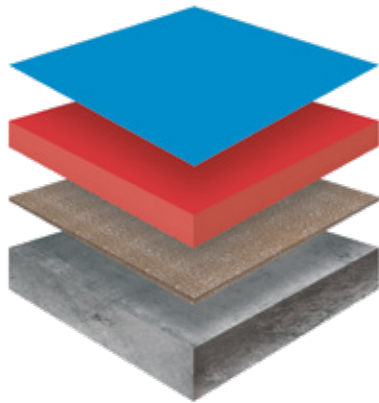

Protective Coats
StenCoat® 2PU TOP FX

Ana Kat
StenCoat® SD 601

Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

StenFloor® PAD is a flexible, self-leveling, polyurethane based coating system. With high slippage and excellent wear resistance, it has a structure that is resistant to chemical effects, physical stresses and ground movements. It has high resistance to impact absorption, reversal, stinging, tearing and abrasion. It does not contain solvents and can be easily used in indoor and outdoor areas. It is resistant to outdoor conditions, it is recommended to use StenCoat® 2PU TOP UV to increase color resistance in the face of UV rays.

Areas of Use : Sports halls, skating, dance, gymnasiums, tracks, schools, kindergartens, hospitals, offices, health-sports centers, children’s playgrounds.

Base Resin : Polyurethane
Thickness : 3,00 – 3,10 mm
Connector Quantity : 2.950 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Protective Coats	StenCoat® 2PU TOP FX	150
Ana Kat	StenCoat® SD 601	2400
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Properties


- Quick apply
- Self-leveling surface
- Heavy load carrying capacity
- Does not allow the development of bacteria



StenFloor® SCREED is a self-leveling polymer concrete floor paving system. It provides an easy-to-clean, long-lasting, robust and decorative surface that is resistant to thermal shocks, solvents and chemical effects, has excellent wear and impact resistance, does not allow the growth of bacteria. With its excellent physical properties and impermeable structure, it protects the floor it covers from external influences, allows maintenance such as pressurized cold - hot water, steam cleaning. With its water-based and solvent-free structure, it is a product that complies with contemporary expectations and is at peace with the environment.

Areas of Use : Wet and dry areas in food preparation places, soft drink facilities, heat treatment areas and cold rooms, all closed areas where forklift, pallet trucks and vehicle traffic are concerned, environments where frequently cleaned thermal shocks, solvents and chemicals that will cause corrosion, chemical process areas, water filling facilities, dining halls, laboratories, medium and heavy service workplaces, warehouse and packaging areas, maintenance and repair, production facilities, printing houses.

Base Resin : Polyurethane
Thickness : 4,70 – 4,90 mm
Connector Quantity : 8,400 g/m²
Color Catalog : RAL 1001 Beige
RAL 1006 Yellow
RAL 3009 Red
RAL 6010 Green
RAL 7037 Powder Grey
RAL 7032 Grey
RAL 7046 Telegri

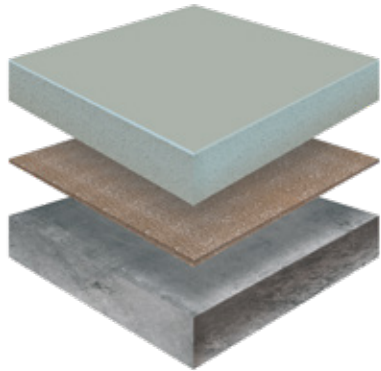

Ana Kat
StenScreed® 402S

Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Ana Kat	StenScreed® 402S	8000
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Properties


- Quick apply
- Heavy load carrying capacity
- +160°C thermal shock resistance
- Does not allow the development of bacteria



StenFloor® ARMOR is a self-leveling polymer concrete floor covering system that can be applied in thicknesses of 6 mm and above. It provides an easy-to-clean, long-lasting, solid and decorative surface that is resistant to very high thermal shocks, solvents and chemical effects, has excellent abrasion and impact resistance, does not allow the growth of bacteria. With its excellent physical properties and impermeable structure, it protects the floor it covers from external influences and allows maintenance such as pressurized cold-hot water, steam cleaning. With its water-based and solvent-free structure, it is a product that complies with contemporary expectations and is at peace with the environment.

Areas of Use : Heat treatment areas and cold rooms, all enclosed areas where forklift, pallet trucks and vehicle traffic are involved, environments where thermal shocks, solvents and chemicals that will cause corrosion, chemical process areas, wet and dry areas in food preparation places, soft drink facilities, water filling facilities, dining halls, laboratories, medium and heavy service workplaces, warehouse and packaging areas, maintenance and repair, production facilities, printing houses.

Base Resin : Polyurethane
Thickness : 6,50 - 6,70 mm
Connector Quantity : 12900 g/m²
Color Catalog : RAL 1001 Beige
RAL 1006 Yellow
RAL 3009 Red
RAL 6010 Green
RAL 7037 Powder Grey
RAL 7032 Grey
RAL 7046 Telegri

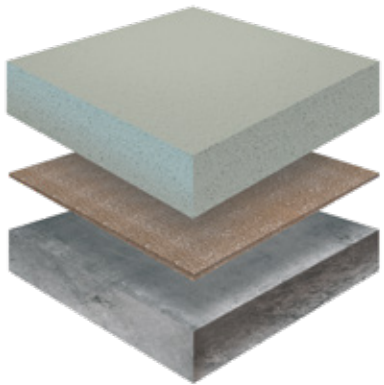

Ana Kat
StenScreed® 600S


Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Ana Kat	StenScreed® 600G	12500
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400

Propertie

- Decorative
- Robust & Durable
- High chemical resistance
- Wide choice of designs

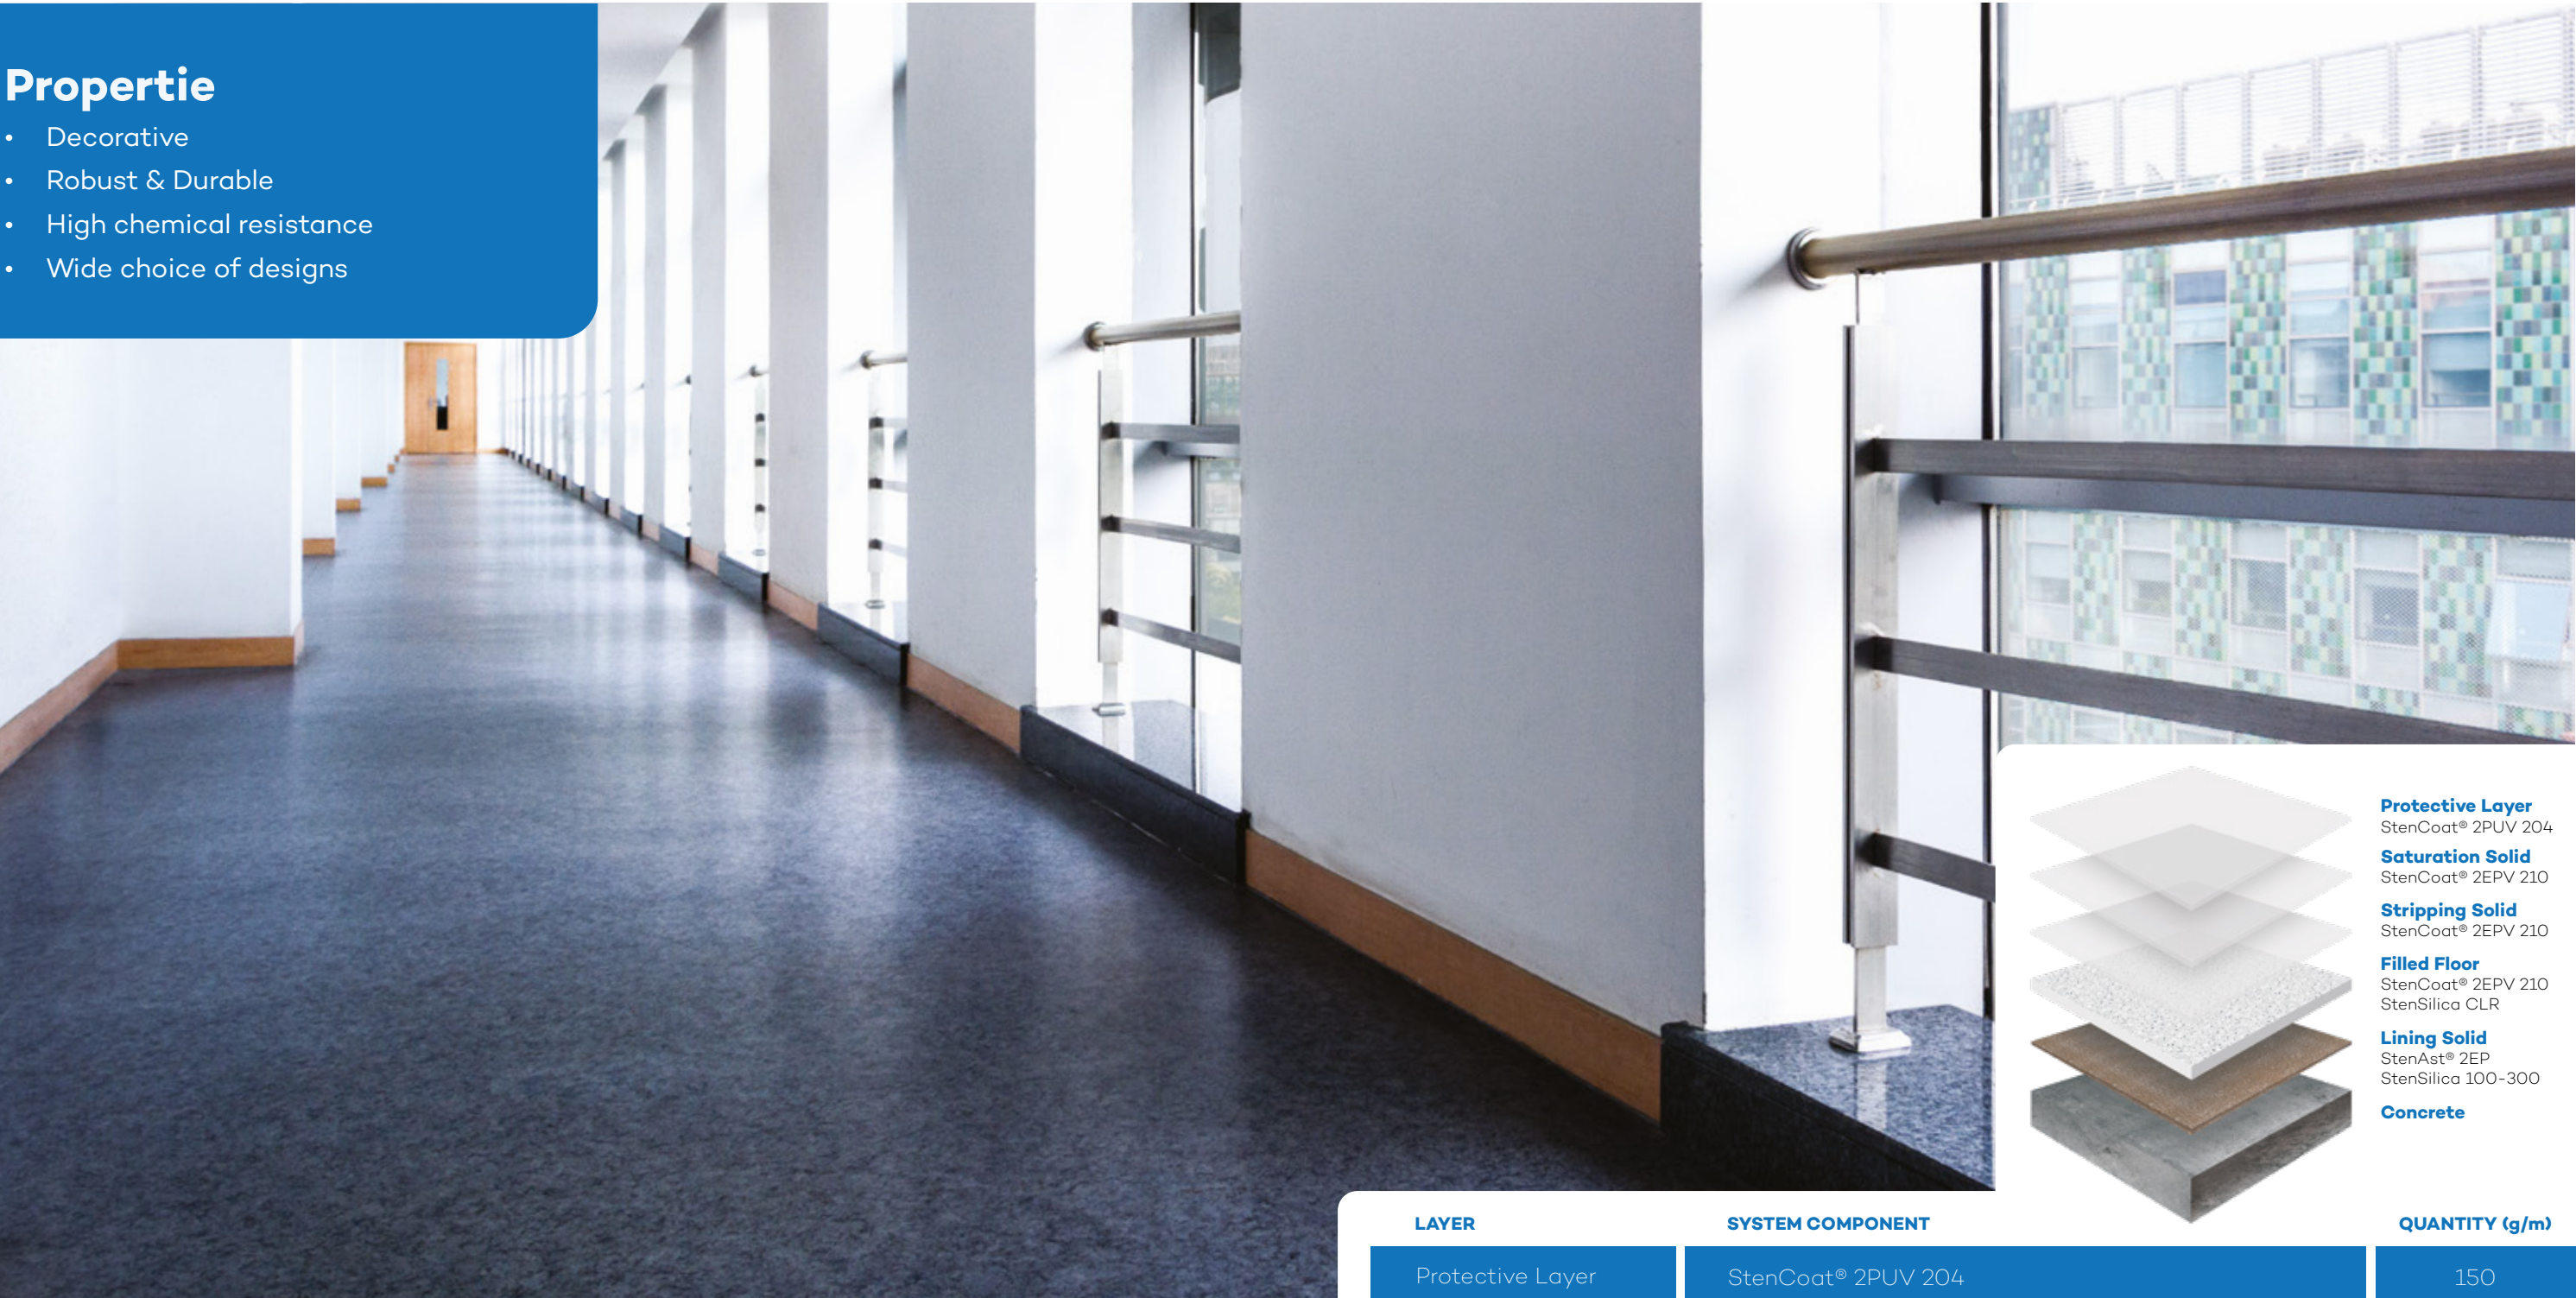

StenFloor® CORAL is the ideal decorative floor system for heavy duty. The granular but smooth appearance obtained by using colored fillings offers aesthetic solutions. It is resistant to abrasion, chemical effects and penetration, creates a long-lasting and robust surface in a seamless structure. The system does not contain solvents, allows use in closed areas. It is resistant to inorganic acids and alkalis, oil, fuel and antifreeze, and many chemicals.


Areas of Use : Kitchens, pharmaceutical research centers, restaurants, hospitals, schools, banks, lobbies, shopping malls, shops, airport terminals, train and bus stations, congress centers.

Base Resin : Epoxy
Thickness : 5,30 - 5,40 mm
Connector Quantity : 3.600 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Protective Layer	StenCoat® 2PUV 204	150
Saturation Solid	StenCoat® 2EPV 210	1300
Stripping Solid	StenCoat® 2EPV 210	550
Filled Floor	StenCoat® 2EPV 210 StenSilica CLR	1300 3150
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	300 300

Properties

- Re-polishable
- Wide range of uses
- Allows custom designs
- A long-lasting, permanent surface

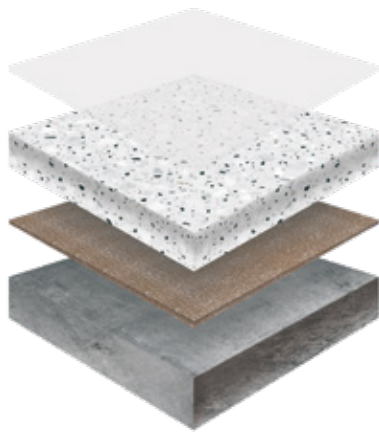

Protective Layer
StenCoat® 2PUV 203

Balcony
StenCoat® 2EP 310
StenSilica TRZ

Lining Solid
StenAst® 2EP
StenSilica 100-300

Concrete

StenFloor® TERRA is an epoxy-based terrazzo system for long-lasting, permanent and decorative surfaces. It has high wear resistance. To create custom design options, thin or thick mineral aggregates in different colors, colored or transparent glass, mirror parts, suitable synthetic aggregates are used in combination with seashells. It is not affected by water, detergents and disinfectants. It creates easy-to-clean, dusting, color-changing, seamless floors. Optionally, it can be finished semi-matte or glossy. The floors that are worn out over time can only be renewed to the appearance of the first day with the application of the last layer.

Areas of Use : Airport terminals, hospitals, restaurants, kitchens, pharmaceutical research centers, schools, banks, lobbies, shopping malls, train and bus stations, congress centers.

Base Resin : Epoxy
Thickness : 11,50 - 11,70 mm
Connector Quantity : 4.300 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Protective Layer	StenCoat® 2PUV 203	150
Balcony	StenCoat® 2EP 310 StenSilica TRZ	3750 18750
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400


BLOCK-W

StenFloor®



Properties

- Easy to apply
- Long-lasting insulation
- Crack bridging feature
- Does not undergo hydrolysis and does not leave the surface

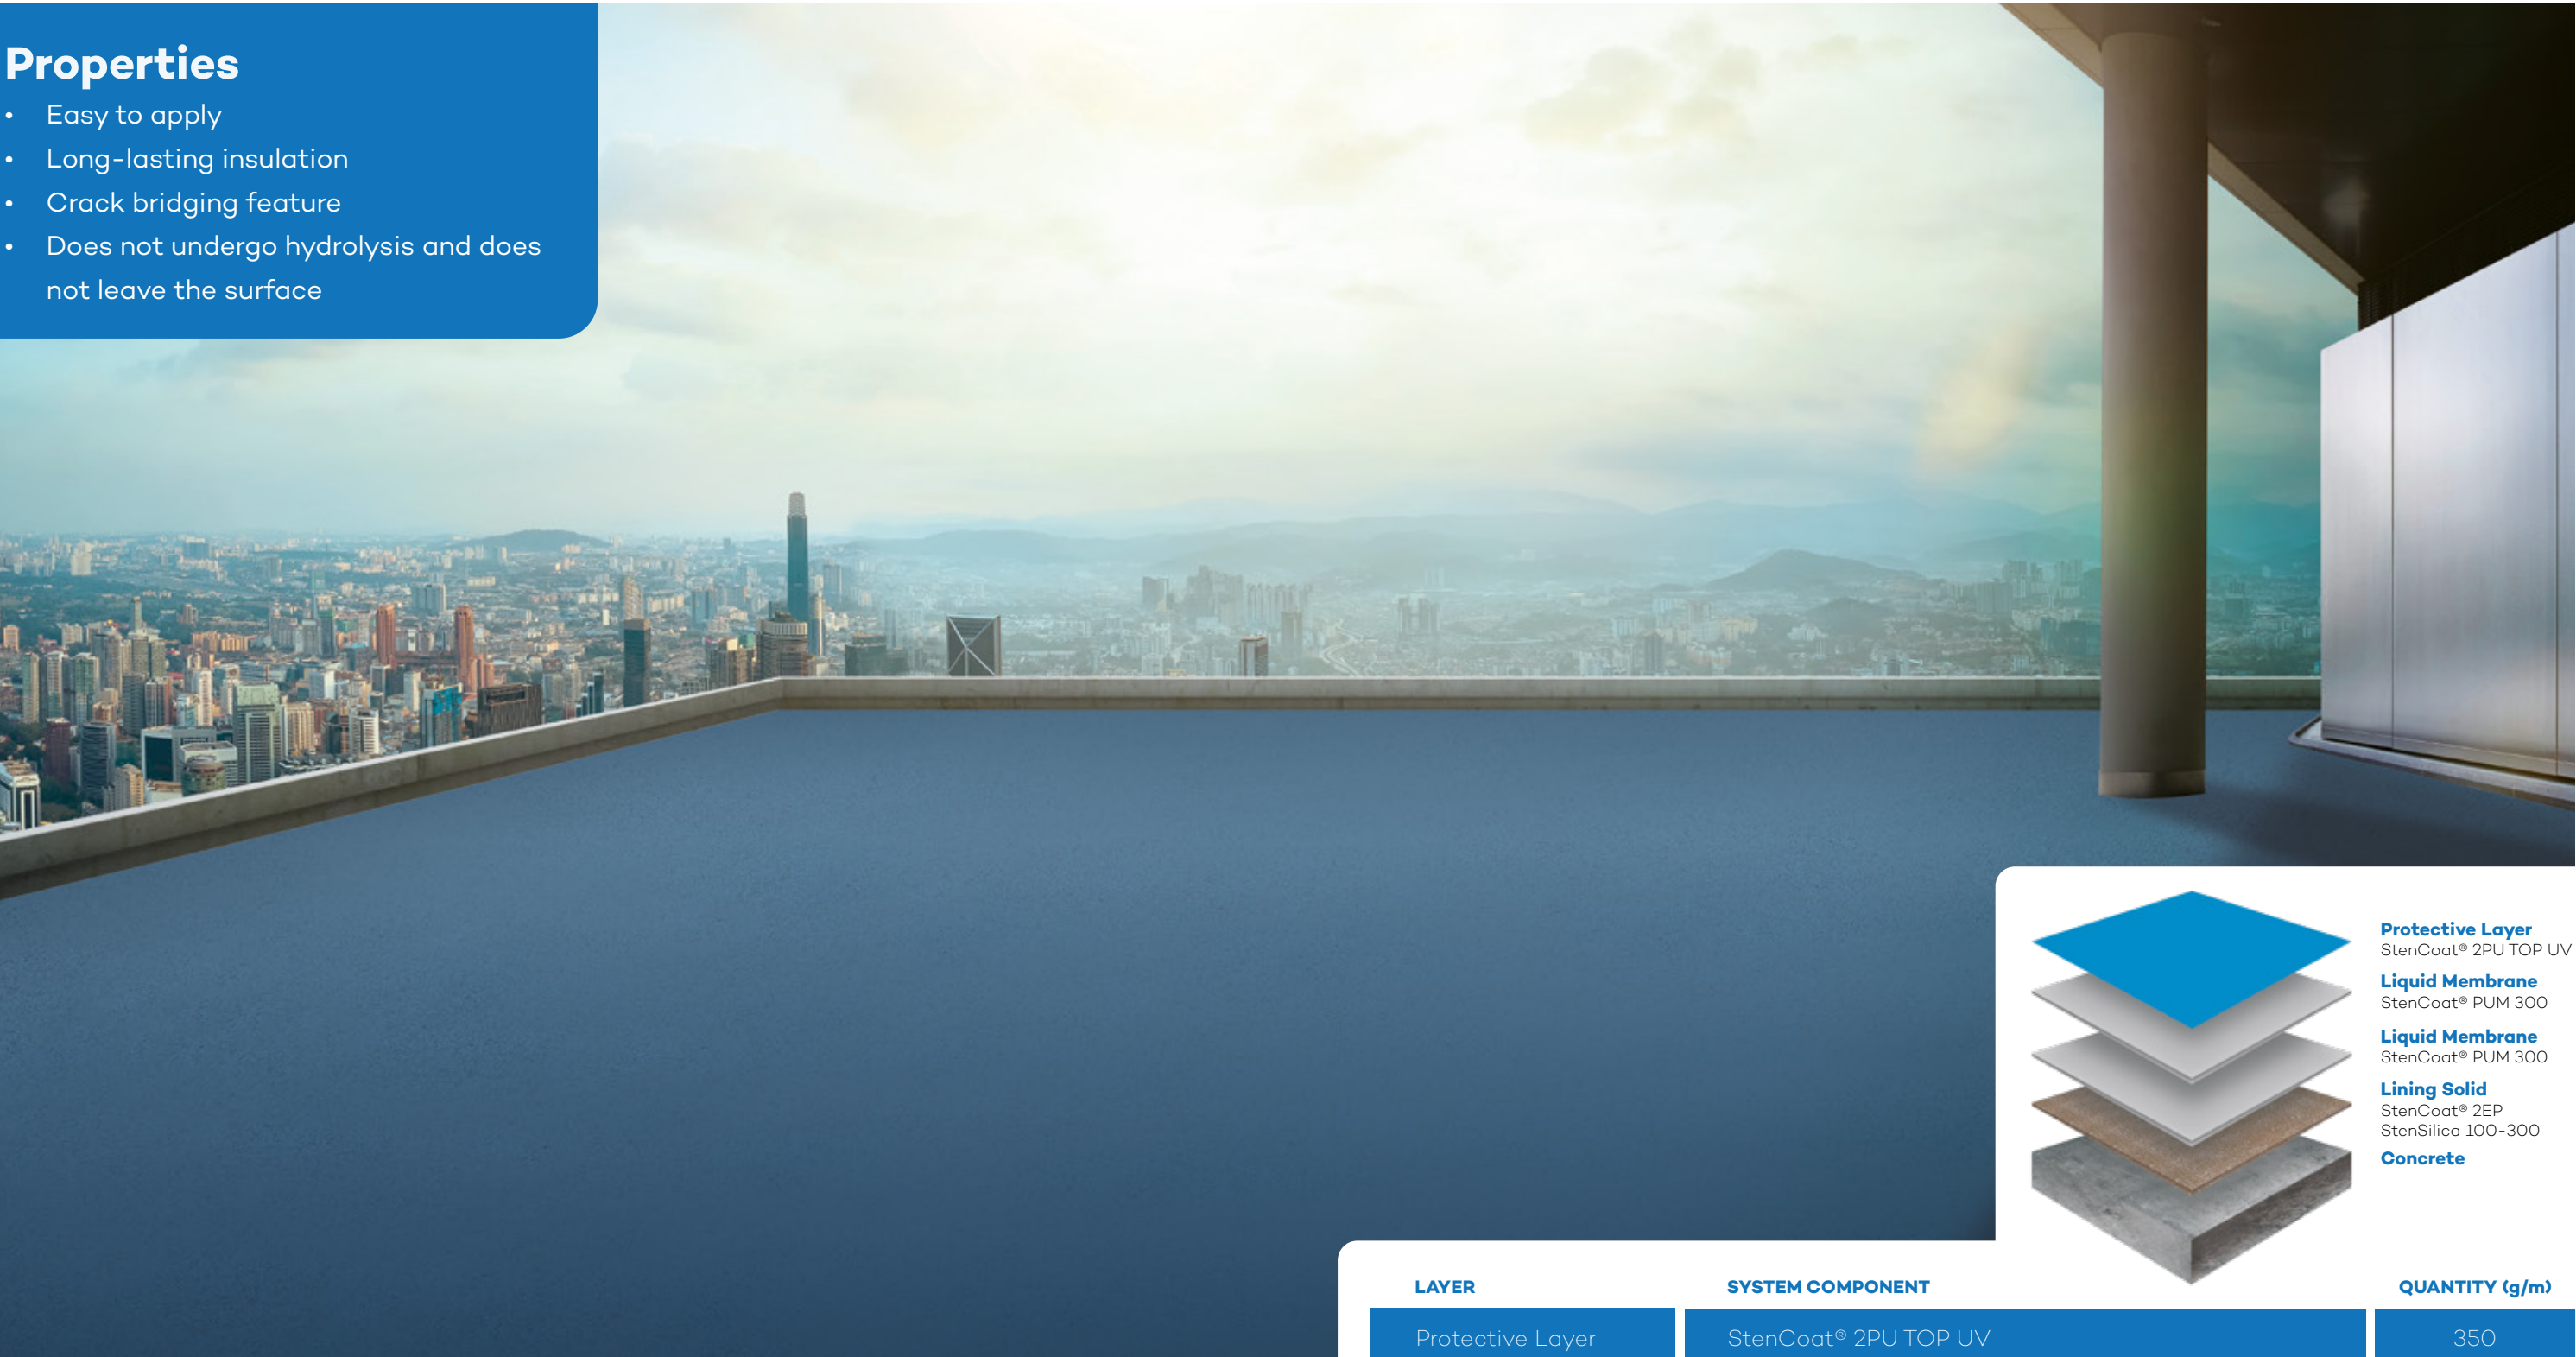

StenFloor® BLOCK-W is a polyurethane-based, highly flexible, self-surfaced, easy-to-apply, insulation and protection coating. It is used for terrace and roof insulation. It is applied as a liquid and forms a flexible, breathable and water-impermeable coating. It has high flexibility and crack bridging feature. There is no change in mechanical properties due to external conditions.

Areas of Use : Terraces and roofs, industrial facilities, prefabricated buildings, bathrooms and similar wet spaces.

Base Resin : Polyurethane
Thickness : 1,90 – 2,10 mm
Connector Quantity : 2.000 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Protective Layer	StenCoat® 2PU TOP UV	350
Liquid Membrane	StenCoat® PUM 300	700
Liquid Membrane	StenCoat® PUM 300	700
Sand Blunt	StenSilica 500 MIX	1000
Lining Solid	StenCoat® 2EP StenSilica 100-300	250 250


BLOCK-HW

StenFloor®



Properties

- Easy to apply
- Can carry traffic
- Long-lasting insulation
- Crack bridging feature
- Does not undergo hydrolysis

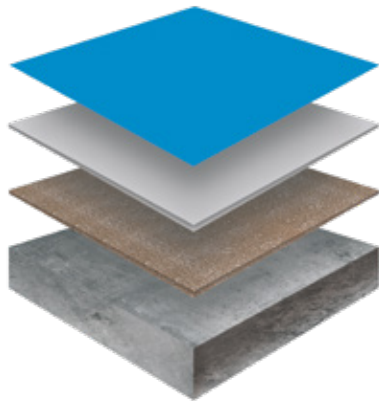

- Protective Layer**
StenCoat® 2PU TOP FX
- Liquid Membrane**
StenCoat® DURPLUS
- Lining Solid**
StenAst® 2EP
StenSilica 100-300
- Concrete**

StenFloor® BLOCK-HW is a polyurethane-based, traffic-bearing, heavy-duty, colored water impermeability system. It protects the coated surface from all outdoor effects. Resistant to ultraviolet rays. It can be used to make all types of surfaces, horizontal or slightly inclined, waterproof. The coated surfaces are not affected by water, they are easy to clean, dry easily and do not dust. The coating retains its elasticity and wear resistance for a long time. It covers the cracks, bugs and joints of the floor, providing it with a smooth top layer.

Areas of Use : Multi-storey car parks, open garages, terraces and roofs, prefabricated buildings, bathrooms and similar wet areas, walking paths, industrial facilities.

Base Resin : Polyurethane
Thickness : 2,50 – 2,70 mm
Connector Quantity : 2.050 g/m²²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Protective Layer	StenCoat® 2PU TOP FX	150
Liquid Membrane	StenCoat® DURPLUS	1500
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenAst® 2EP StenSilica 100-300	400 400


BLOCK-C

StenFloor®



Properties

- High insulation
- Provides occupational safety
- Long service life

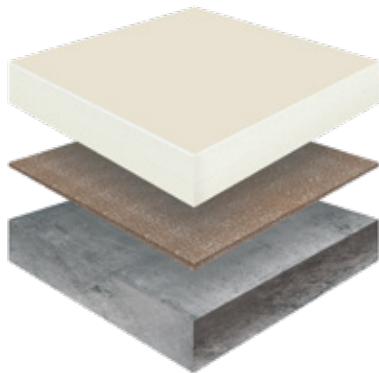

Insulating Coating
StenCoat® 2EP YALIT

Lining Solid
StenCoat® 2EP
StenSilica 100-300

Concrete

StenFloor® BLOCK-C is a high insulating floor covering system that can be applied to any floor in any place where electrical insulation is required from the floor. It provides occupational safety on the floors stepped on by the people who will intervene in the electrical panels. It has excellent wear resistance, a structure resistant to chemical influences. It consists of solvent-free epoxy resin, pigment and solid filler. It is a long-lasting and robust coating system with no attachments, resistant to abrasion, impact, chemical effects and penetration. It is resistant to organic and inorganic acids and alkalis, oil, fuel and antifreeze, and many chemicals.


Areas of Use : Switches, electrical control rooms and cabinets, where there is a danger of contact with electricity and the possibility of short circuit.

Base Resin : Epoxy
Thickness : 6,30 - 6,40 mm
Connector Quantity : 8.400 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Insulating Coating	StenCoat® 2EP YALIT	8000
Sand Blunt	StenSilica 500 MIX	1500
Lining Solid	StenCoat® 2EP StenSilica 100-300	400 400

Properties

- High conductivity
- Long service life
- Provides occupational safety

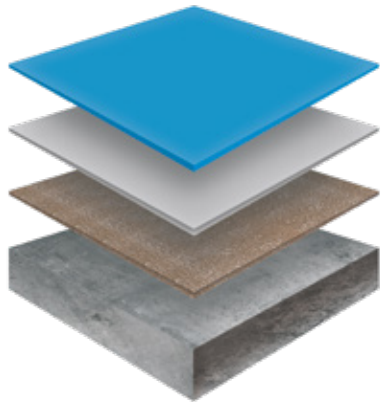

Conductive Finish
StenCoat® 2EP CC

Conductive Primer
StenAst® 2EP CC

Lining Solid
StenAst® 2EP

Concrete

StenFloor® ESD is used to create a floor that will not allow the accumulation of static electricity. It is preferred in areas where high-thickness antistatic coatings or static electricity discharge should be very fast. Surface and volume conductivity is high, can be used as a load distributor. It is not affected by moisture, fuel, oils, inorganic acid and dilute bases.

Areas of Use : Areas where sensitive electronic materials are produced, transported, stored, factory floors, areas where flammable gases are processed, filled or stored, manufacturing, storage areas, fuel tanks of explosive materials.

Base Resin : Epoxy
Thickness : 2,10 – 2,30 mm
Connector Quantity : 2.150 g/m²

LAYER	SYSTEM COMPONENT	QUANTITY (g/m)
Conductive Finish	StenCoat® 2EP CC	1500
Conductive Primer	StenAst® 2EP CC	250
Sand Blunt	StenSilica 500 MIX	1000
Lining Solid	StenAst® 2EP	400

SPECIAL PAINTS FOR EVERY NEED

By increasing the resistance of your **StenFloor®** polymeric floor systems to adverse environmental conditions, you can extend their service life and provide safer working areas with markings. Depending on the environmental factors of the area where it is applied, you can increase the sun ray, chemical, scratch, wear, abrasion or slip resistance of your **StenFloor®** floor system if you need it.

EPOXY BASED TRANSPARENT FLOOR VARNISHES



StenCoat® 2EPV

They increase the wear and fouling resistance of the applied surface and can also be used in the external environment. They are not affected by pool chemicals, weak acids and bases, detergents, disinfectants, fuels, hydraulic oils and most solvents. Depending on your needs, you can choose between low-solvent **StenCoat® 2EPV 201** or solvent-free **StenCoat® 2EPV 210** products.



StenCoat® 3EP GRIP

In addition to the strengths provided by the **StenCoat® 2EPV** series, it increases the slip resistance of the surface without distorting the floor appearance. It is used to ensure security in all floors where there is a danger of slipping, especially in wet areas, pool edges, bath tubs, tile floors, kitchen floors, building entrances, restaurants, shopping malls, hotels.

POLYURETHANE BASED TRANSPARENT FLOOR VARNISHES

StenCoat® 2PUV 203

While increasing the resistance of the surfaces against UV rays, it provides easy cleaning, easy drying of the surface and prevents dusting. It retains its flexibility and wear resistance for a long time. It covers the cracks, bugs and attachment points of the floor, giving it a smooth and shiny upper layer. For matte surfaces, the matte version of **StenCoat® 2PUV 204** can be used.

STENCOAT® 2PU TOP POLYURETHANE BASED PROTECTIVE PAINTS



It is resistant to chemical effects, external conditions and UV radiation. Over time, it does not lose its resistance and color. It protects the applied surface against water penetration, increases its resistance to oxidation and abrasion. Protects floor systems against sun rays, scratches, abrasions and impacts. It can be used as a protective layer in any floor system or for marking purposes. It allows different designs with various color options.



StenCoat® 2PU TOP HD

Designed for heavy duty floor systems.

StenCoat® 2PU TOP FX

It is designed to increase the strength of the floor while maintaining its elastic properties.

StenCoat® 2PU TOP UV

It is a highly flexible floor paint designed especially to protect liquid membranes from the sun's rays.

ROAD MARKING PAINTS



StenCoat® CR-L

Acrylic is a latex based, solvent-free road line and marking paint. Easy to apply and dry quickly. Resistant to outdoor conditions and traffic. It is also suitable for use in parking lots, sidewalks, industrial facilities and other areas in need of marking. It is preferred in applications where traffic-exposed, water-based, solvent-free materials are required. Thanks to its special chemical structure, it is a paint that dries faster and lasts longer than ordinary water-based paints. Complies with TT-P-1952F.



StenCoat® CR-LID

Acrylic is a latex based road line and marking paint. It is one-component, solvent-free. Easy to apply and dry quickly. Complies with TT-P-1952F Type III.

PRIMERS AND SURFACE CONDITIONERS

StenAst® 2EP

Designed for general purpose use.

StenAst® 2EP F

Designed for situations that require a filled lining.

StenAst® 2EP CC

Designed for antistatic systems.

StenAst® 2EP OR

Designed for oily surfaces.

StenAst® 2EP MB

Designed for situations that require a moisture barrier.

StenAst® 2EP MT

Designed for situations that require moisture tolerance.

Stenkim Construction Chemicals

produces high quality products in accordance with international standards in all production items. With its high production capacity and product diversity, Stenkim Construction Chemicals has taken part in and continues to take part in large and prestigious projects not only in Turkey but also in more than 35 countries.





US HEADQUARTERS

901 Mittel Drive,
Wood Dale, IL **60191**

T. +1 847 550 3775
F. +1 847 430 4803

OFFICE

Aziziye Mah. Portakal Çiçeđi Sokak
Ansera Is Merkezi No: 17-126
Cankaya - ANKARA / TURKEY

T. +90 312 442 2630
F. +90 312 442 2615

FACTORY

Kavakli Mahallesi
Kavakli Kumeevleri No: 159
Altındag - ANKARA / TURKEY

T. +90 312 399 1028
F. +90 312 399 1032